


MASTERTOP® 1221

Sistem epoxidic cu finisaj antiderapant, disponibil in gama variata de culori

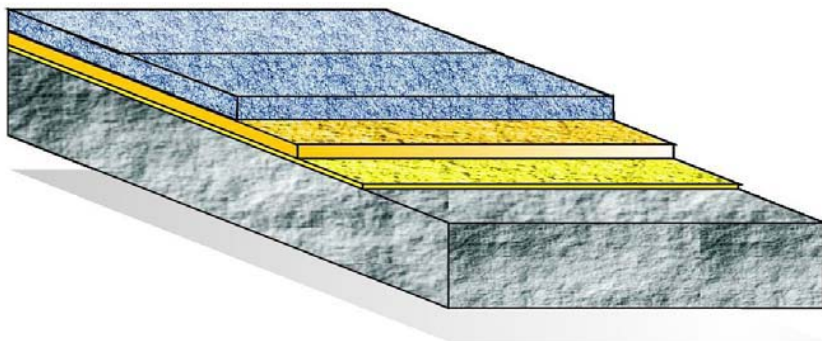

			Consum
■	Amorsa	MASTERTOP P 617 (sau P 615 fara armare cu nisip quartos), transparent, EP, bicomponent, fara solventi	0.3 - 0.5 kg/m ²
	Armarea cu nisip quartos	Se armeaza cu nisip quartos uscat, granulatie 0.3 - 0.8 mm, aplicat uniform, nu in exces	0.8 - 1.0 kg/m ²
■	Strat de egalizare (optional)	MASTERTOP P 617, umplut in raport 1 : 0.5 cu nisip quartos uscat, granulatie 0.1 - 0.3 mm	0.6 - 1.0 kg/m ² *
	Armarea cu nisip quartos	Se armeaza cu nisip quartos uscat, granulatie 0.3 - 0.8 mm	2.0 - 3.0 kg/m ²
■	Strat de baza	MASTERTOP BC 370, EP, pigmentat, bicomponent fara continut de solvent	0.9 - 1.2 kg/m ²
	Armarea cu nisip quartos	Se armeaza cu nisip quartos colorat, uscat, in exces. granulatie nisip quartos colorat 0.6 - 1.2 mm	2.0 - 2.5 kg/m ²
□	Sigilant	MASTERTOP BC 300 sau TC 404, transparent, EP, bicomponent, fara continut de solvent	0.7 - 1.0 kg/m ²
+	Strat Final	MASTERTOP TC 443 C, transparent, PU, lucios bicomponent, continut scazut de solvent	0.12 - 0.16 kg/m ²
Grosime Totala Sistem			2.0 - 2.5 mm

* Inklusiv nisip quartos uscat