


MASTERTOP® 1325 (CONIFLOOR C)

Sistem poliuretanic lis cu finisaj mat sau satinat

Acolo unde sunt cerinte de pardoseli cu rezistenta la fisurare, reducere a zgomotului, grad ridicat de confort combinat cu absortie de sunet.

Aplicatiile uzuale sunt: birouri, sali de expozitie sau terenuri de joaca, cofetarii, restaurante, cantine, spitale, coridoare in cladiri publice, etc.

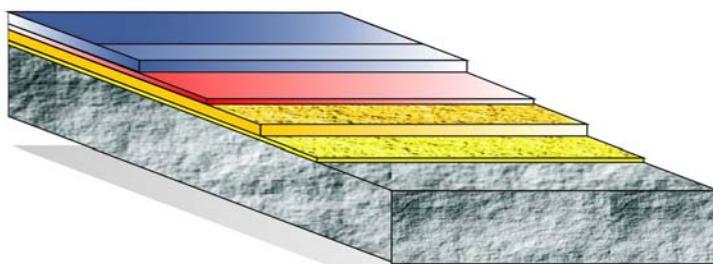

		Consum	
<input checked="" type="checkbox"/>	Amorsa	MASTERTOP P 617 (sau P 615 fara armare cu nisip quartos), transparent, EP, bicomponent, fara solventi	0.3 - 0.5 kg/m ²
<input checked="" type="checkbox"/>	Armarea cu nisip quartos	Se armeaza cu nisip quartos uscat, granulatie 0.3 - 0.8 mm, aplicat uniform, nu in exces	0.8 - 1.0 kg/m ²
<input checked="" type="checkbox"/>	Strat de egalizare (optional)	MASTERTOP P 617, umplut in raport 1 : 0.5 cu nisip quartos uscat, granulatie 0.1 - 0.3 mm	0.6 - 1.0 kg/m ² *
<input checked="" type="checkbox"/>	Armarea cu nisip quartos	Se armeaza cu nisip quartos uscat, granulatie 0.3 - 0.8 mm	2.0 - 3.0 kg/m ²
<input checked="" type="checkbox"/>	Strat de umplere a porilor	MASTERTOP BC 325 N, pigmentat, PU, bicomponent, fara solventi, umplut in raport 1 : 0.3 cu nisip quartos uscat, granulatie 0.1 - 0.3 mm	0.8 - 1.0 kg/m ² *
<input checked="" type="checkbox"/>	Strat de baza	MASTERTOP BC 325 N, umplut in raport 1 : 0.3 cu nisip quartos uscat, granulatie 0.1-0.3 mm	2.5 - 3.0 kg/m ² *
<input type="checkbox"/>	Strat Final	MASTERTOP TC 465, pigmentat, PU, bicomponent, contine solvent, stabil UV, satin mat	0.11 - 0.15 kg/m ²
sau			
<input type="checkbox"/>	Strat Final ** (daca sunt folositi fulgi decorativevi)	MASTERTOP TC 467 C-N, transparent, PU, bicomponent, stabil UV, satin mat sau MASTERTOP TC 407 W, transparent, PU, mat, stabil UV pe baza de apa, bicomponent	0.11 - 0.15 kg/m ² 0.10 - 0.12 kg/m ²
Grosime Totala Sistem		2.0 – 3.0 mm	

* Inclusiv nisip quartos uscat

** Stratul final poate preveni doar parcial ingalbenirea stratului de baza